



# AT&T NVG510 Button Replacement

Replace buttons on your NVG510 modem.

Written By: Shawn Rogers



## INTRODUCTION

This guide will show you how to replace buttons on the NVG510 modem.

---



### TOOLS:

- [Solder](#) (1)
  - [Screwdriver](#) (1)
  - [2.0 flathead bit](#) (1)
-

## Step 1 — Reset and Wi-Fi Buttons




- Flip the router over so the stickers are facing upward.
- Remove rubber stands from the left corner only

## Step 2



- Take out both screws using the bit driver and 2.0 flathead


## Step 3

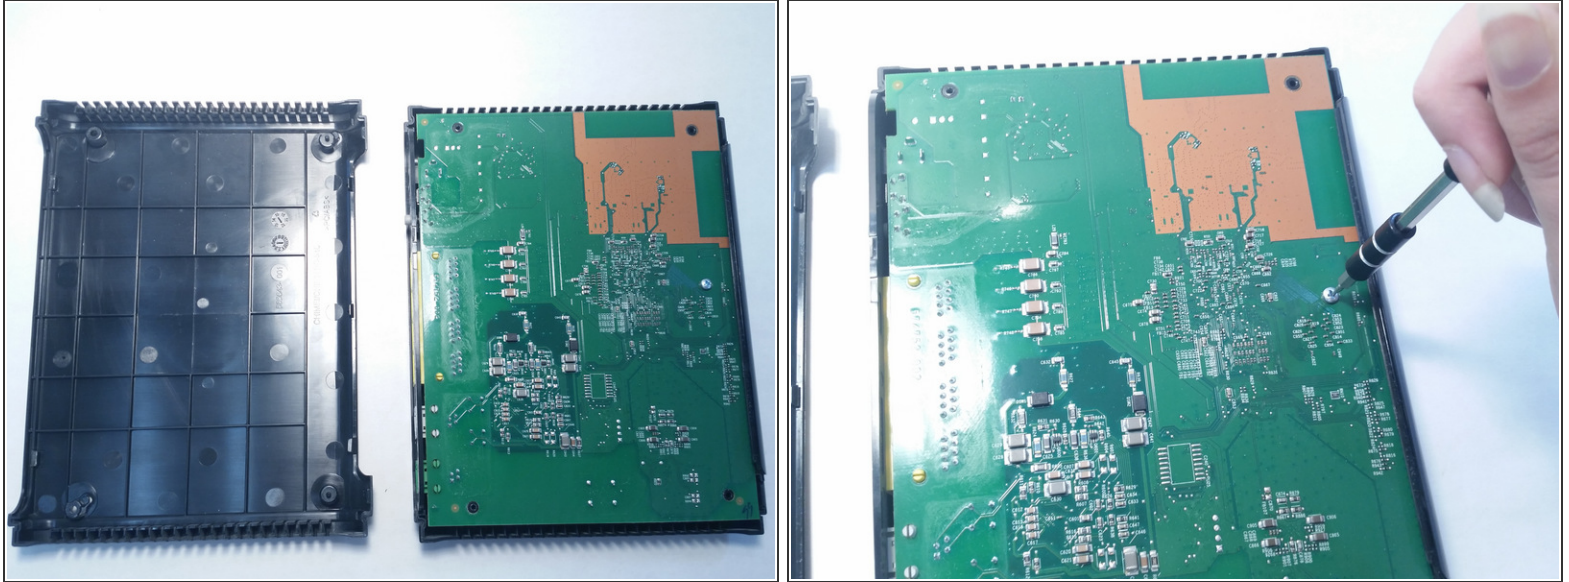

- The case should now be open and the board should be revealed
  - Take out the one screw located on the middle left of the board
- i** It may take some force to open the case




## Step 4

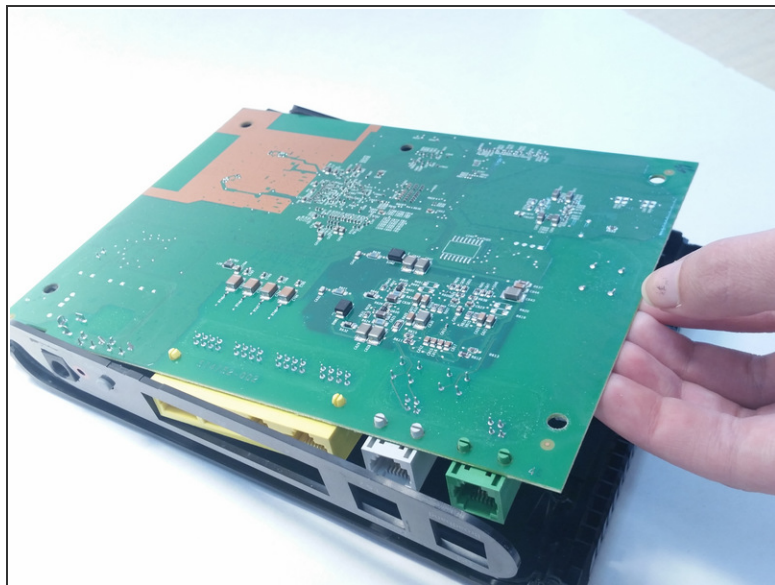




- Lift the board out of the case
- ⓘ Lift up slowly to ensure there will be no damage to the board

## Step 5

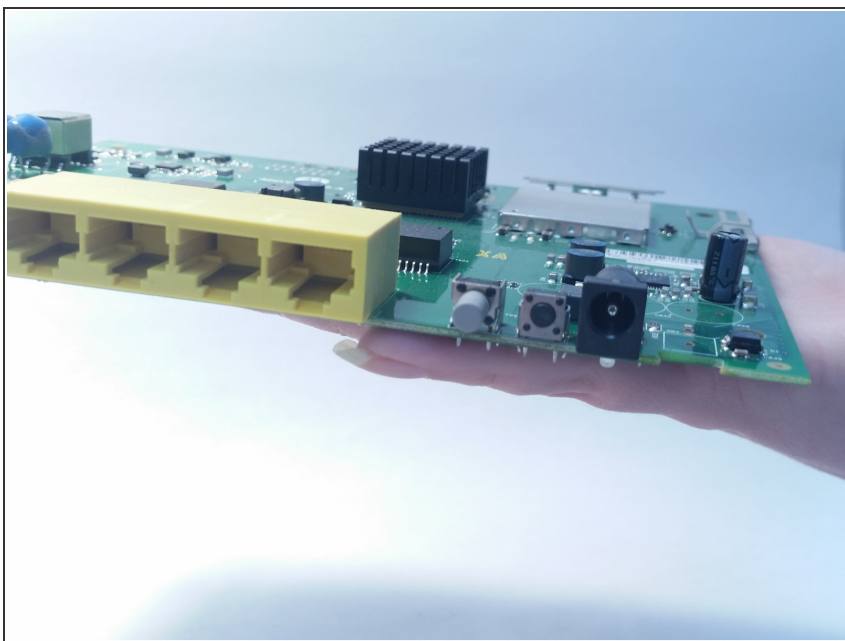


- Locate the buttons near the yellow ports, they are to the right of the ports.

## Step 6

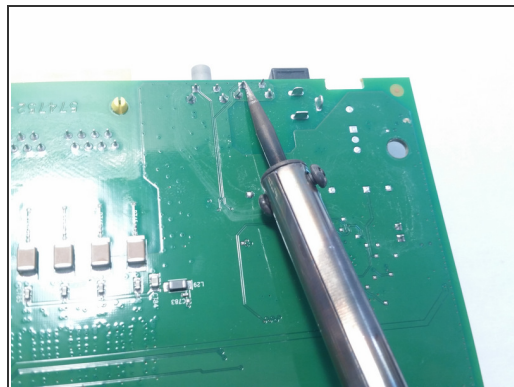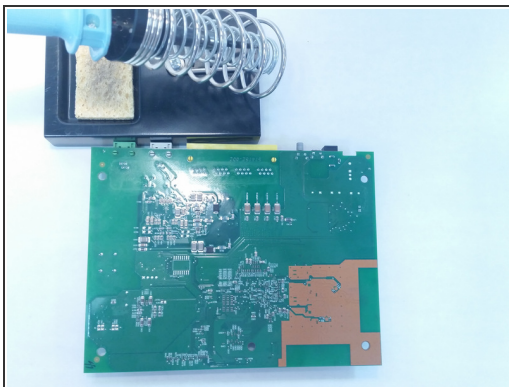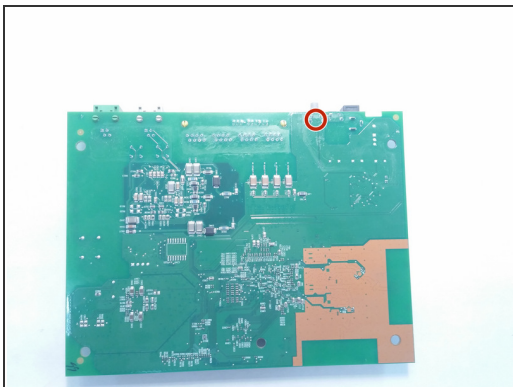

- Using a solder, locate the silver points
- Heat up the silver points to melt them off to release the button from the board

 Avoid contact with the board with the solder, only touch the silver points

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-21 06:14:16 PM.